
# Plastic Wall Fans with Shutter (Reversible)

Ventilating capacity up to 1200cmh. Quiet operation with its low noise level. Easy maintenance with normal cleaning from time to time. Small and compact design. Light weight and easy to install.

Fan casing, blades and cover are made of injection moulded plastic. The motors are single phase shaded pole type, 240V 50/60Hz. Electrical insulation is class B suitable for ambient temperature up to 40 degrees Celsius.

Pressure (pa)



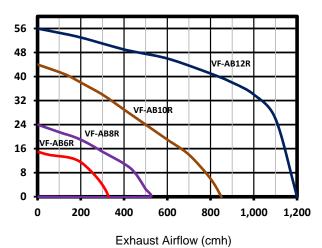

#### **Characters:**


- + High airflow and quiet
- + Easy installation for wall mounted
- + PP plastic body and shutter
- + Silicon steel motor with built-in thermo cut-off protection, class B insulation
- + Moisture resistant, suitable for humid and damp environment
- + Operating in temperatures ranging -14°C to +40°C
- + Easy Maintenance
- + On, reverse and Off operated by pull cord switch

| Specifica | ation   |        |       |       |               |            |       |
|-----------|---------|--------|-------|-------|---------------|------------|-------|
| Model     | Exhaust | Intake | Power | Speed | Rated Voltage | Insulation | Sound |
|           | (cmh)   | (cmh)  | (kw)  | (rpm) | (V/ph/Hz)     | Class      | (dBA) |
| VF-AB6R   | 330     | 265    | 0.025 | 1400  | 220~240/1/50  | В          | 45    |
| VF-AB8R   | 520     | 415    | 0.028 | 1300  | 220~240/1/50  | В          | 48    |
| VF-AB10R  | 860     | 690    | 0.036 | 1100  | 220~240/1/50  | В          | 51    |
| VF-AB12R  | 1200    | 860    | 0.048 | 1050  | 220~240/1/50  | В          | 55    |

#### **Dimensions (mm)**

Specification

| Model    | Diam | Α         | В  | С  | D   | Wall      | Weight |
|----------|------|-----------|----|----|-----|-----------|--------|
|          | (mm) |           |    |    |     | Opening   | (kg)   |
| VF-AB6R  | 150  | 225 x 225 | 48 | 75 | 193 | 195 x 195 | 1.8    |
| VF-AB8R  | 200  | 295 x 295 | 48 | 85 | 242 | 245 x 245 | 2.2    |
| VF-AB10R | 250  | 345 x 345 | 48 | 90 | 290 | 295 x 295 | 2.5    |
| VF-AB12R | 300  | 400 x 400 | 48 | 95 | 345 | 350 x 350 | 2.8    |

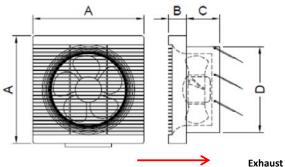

| Color   |       |  |  |  |  |
|---------|-------|--|--|--|--|
| Blades  | White |  |  |  |  |
| Casing  | White |  |  |  |  |
| Shutter | Grey  |  |  |  |  |

Intake




Ventilating capacity up to 500cmh. Quiet operation with its low noise level. Easy maintenance with normal cleaning from time to time. Small and compact design. Light weight and easy to install.

Fan casing, blades and cover are made of injection moulded plastic. The motors are single phase shaded pole type, 240V 50/60Hz. Electrical insulation is class B suitable for ambient temperature up to 40 degrees Celsius.



- Characters:
  + High airflow and quiet
- + Easy installation for glass
- + PP plastic material
- + Silicon steel motor with built-in thermo cut-off protection
- + High glossy surface
- + Class B insulation
- + Moisture resistant, suitable for humid and damp environment
- + Operating in temperatures ranging -14<sup>o</sup>C to +40<sup>o</sup>C
- + Easy Maintenance

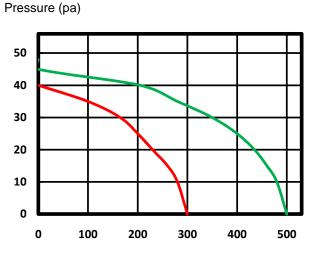


Airflow (cmh)

#### Specification

| Model | Line<br>Color | Air flow<br>(cmh) | Power<br>(kw) | Speed<br>(rpm) | Rated Voltage<br>(V/ph/Hz) | Insulation<br>Class | Sound<br>(dBA) |
|-------|---------------|-------------------|---------------|----------------|----------------------------|---------------------|----------------|
| VF-C6 |               | 300               | 0.015         | 2100           | 220~240/1/50               | В                   | 46             |
| VF-C8 |               | 500               | 0.025         | 1900           | 220~240/1/50               | В                   | 48             |

#### **Dimensions (mm)**

| Model | Diam | Α        | В  | С  | D   | E               | Weight |
|-------|------|----------|----|----|-----|-----------------|--------|
|       | (mm) |          |    |    |     | (glass opening) | (kg)   |
| VF-C6 | 150  | Diam 208 | 44 | 41 | 130 | Diam 183 ~ 188  | 1.7    |
| VF-C8 | 200  | Diam 270 | 50 | 54 | 180 | Diam 241 ~ 246  | 1.9    |

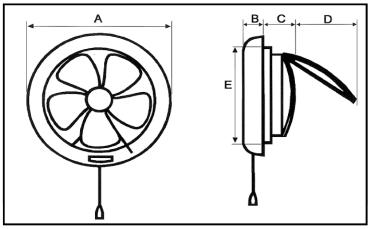


| Color  |       |
|--------|-------|
| Blades | White |
| Casing | White |
| Cover  | Brown |

Fan to be install on glass panel.



Ventilating capacity up to 300cmh. Quiet operation with its low noise level. Easy maintenance with normal cleaning from time to time. Small and compact design. Light weight and easy to install.


Fan casing, blades and cover are made of injection moulded plastic. The motors are single phase shaded pole type, 240V 50/60Hz. Electrical insulation is class B suitable for ambient temperature up to 40 degrees Celsius.

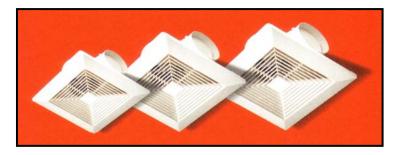

# **Characters:**

- + High airflow and quiet
- + Easy installation for ceiling mounted
- + PP plastic material
- + Silicon steel motor with built-in thermo cut-off protection
- + Class B insulation
- + Moisture resistant, suitable for humid and damp environment
- + Operating in temperatures ranging -14<sup>o</sup>C to +40<sup>o</sup>C
- + Easy Maintenance

### Pressure (pa)

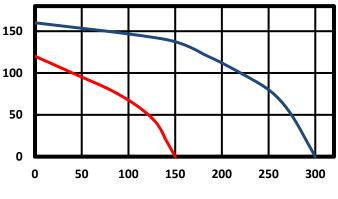


Airflow (cmh)

# **Specification**

| Model     | Line  | Air flow | Power | Speed |           | Insulation | J    | Sound |
|-----------|-------|----------|-------|-------|-----------|------------|------|-------|
|           | Color | (cmh)    | (kw)  | (rpm) | (V/ph/Hz) | Class      | (kg) | (dBA) |
| VF-BT815  |       | 150      | 0.02  | 1400  | 240/1/50  | В          | 2.1  | 47    |
| VF-BT1030 |       | 300      | 0.03  | 1400  | 240/1/50  | В          | 2.7  | 50    |

## **Dimensions (mm)**

| Model     | A         | В  | С  | D   | E   | F   | Ceiling<br>Opening |
|-----------|-----------|----|----|-----|-----|-----|--------------------|
| VF-BT815  | 272 x 272 | 20 | 51 | 100 | 225 | 265 | 265 x 265          |
| VF-BT1030 | 318 x 318 | 20 | 51 | 100 | 273 | 262 | 262 x 262          |

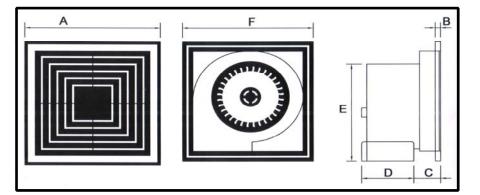

| Color  |       |
|--------|-------|
| Blades | Beige |
| Casing | Beige |
| Cover  | Beige |