



AND 315/5/150 -
315 mm Diameter 2880 Rpm 50 Hz

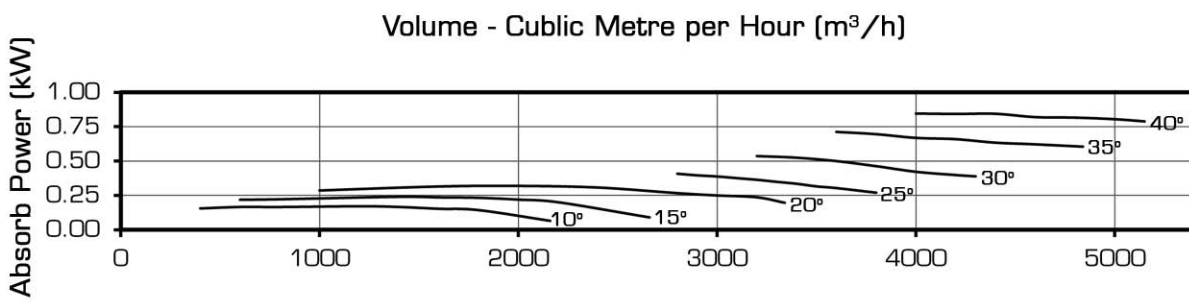

Performance is rated for installation type D - Ducted Inlet, Ducted Outlet.
 Performance rating do not include the effects of appurtenances (accessories).
 Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
 Ratings include the effects of duct end correction.
 The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.


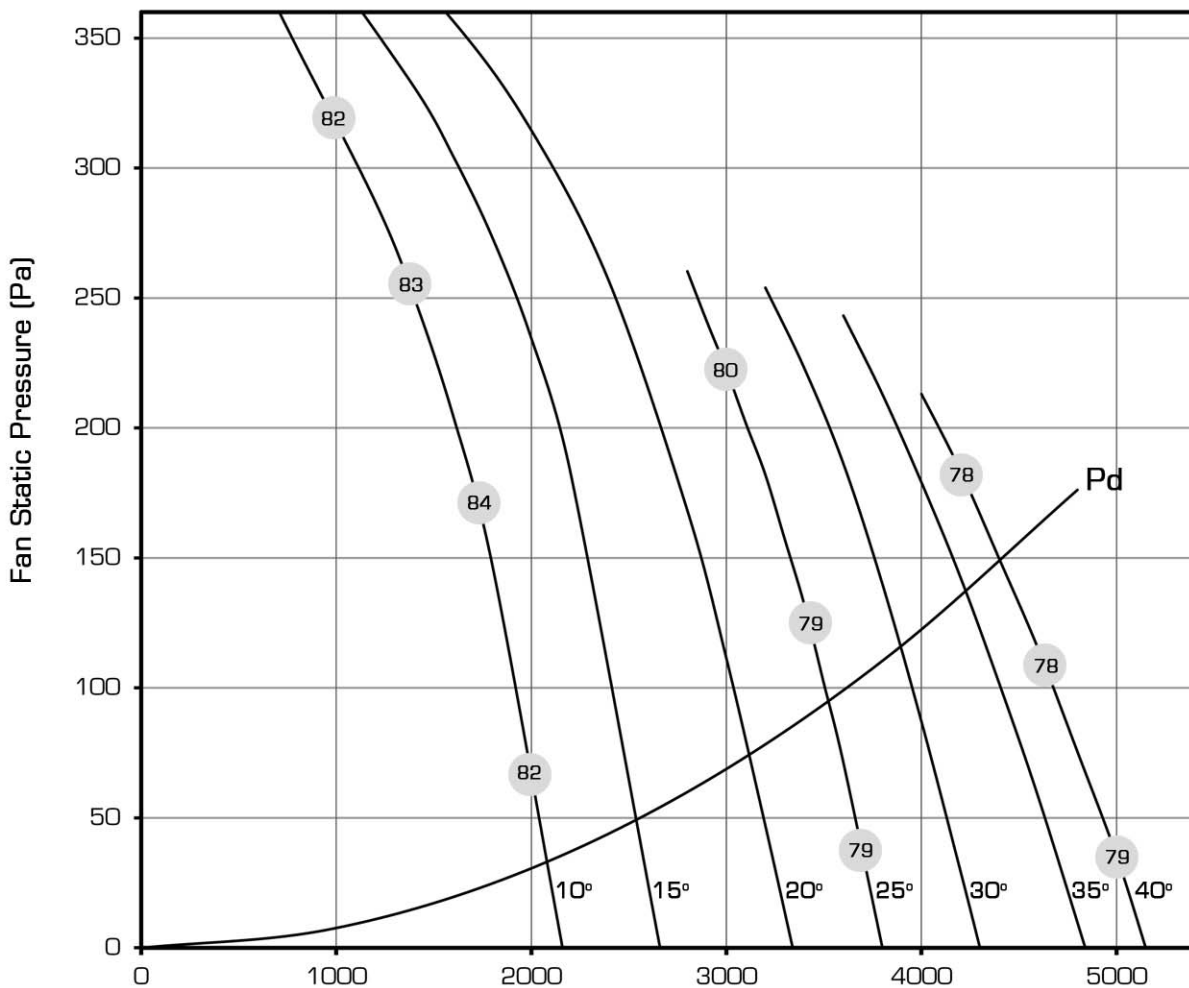


Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	0.171	0.240	0.319	0.408	0.537	0.713	0.846

AND 315/10/150 -
315 mm Diameter 2880 Rpm 50 Hz



Performance certified is for installation type D - Ducted Inlet, Ducted Outlet.
 Performance rating do not include the effects of appurtenances (accessories).
 Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
 Ratings include the effects of duct end correction.
 The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.
 The AMCA Certified Ratings Seal applies to air and sound performance ratings only.

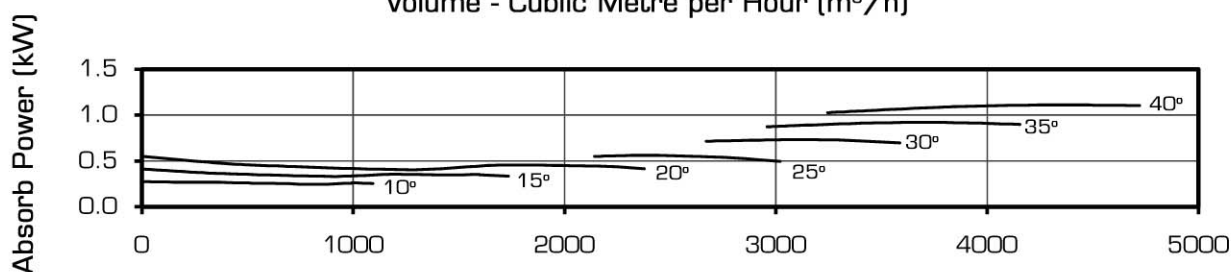
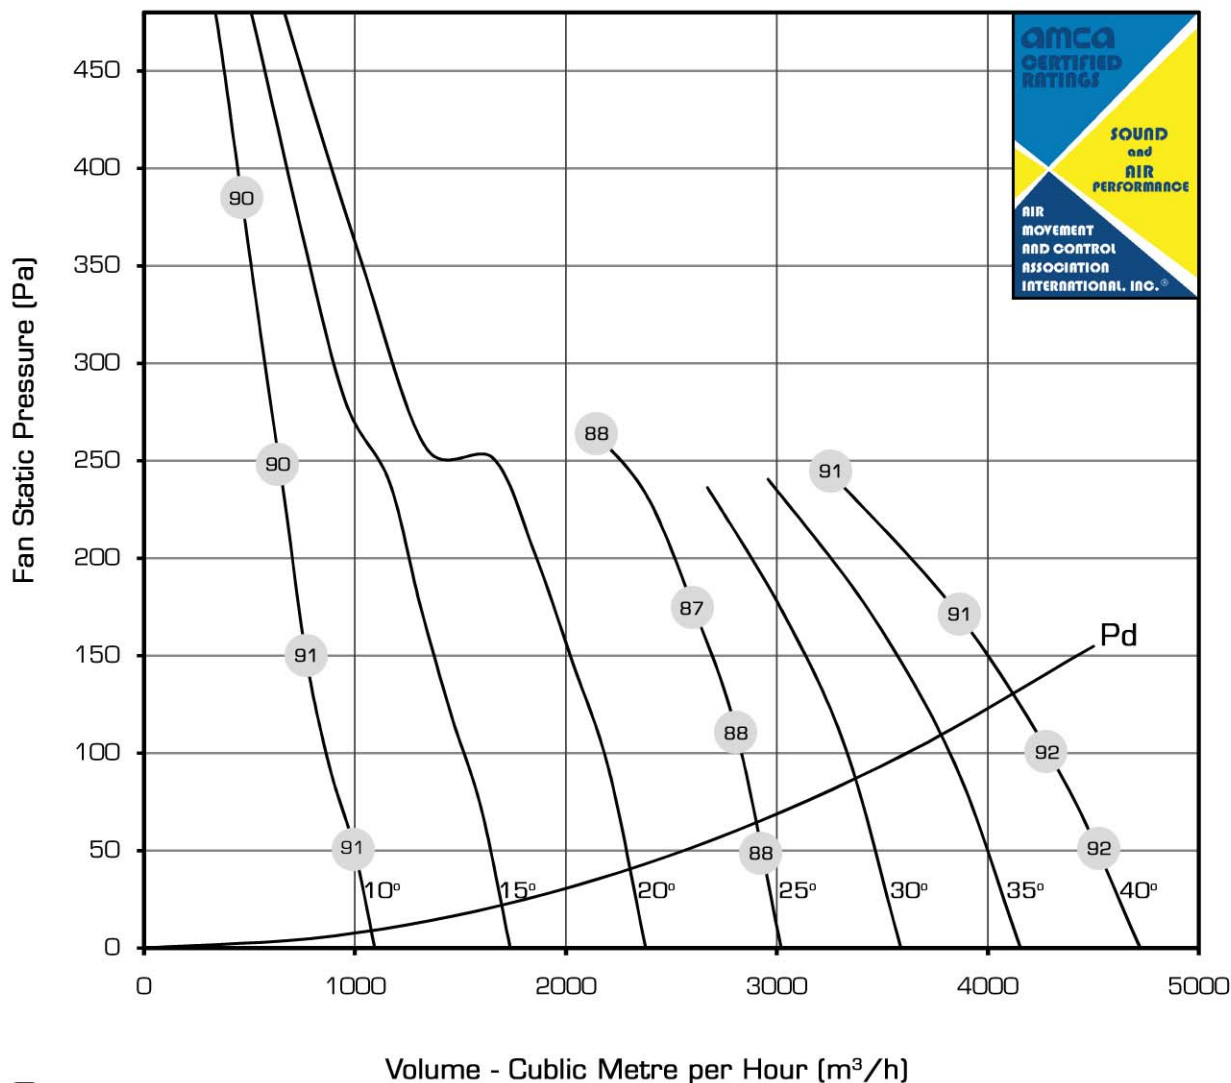


Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	0.272	0.411	0.549	0.688	0.848	1.008	1.168

AND 355/10/150 -
355 mm Diameter 2880 Rpm 50 Hz



Performance is rated for installation type D - Ducted Inlet, Ducted Outlet.
 Performance rating do not include the effects of appurtenances (accessories).
 Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
 Ratings include the effects of duct end correction.
 The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.

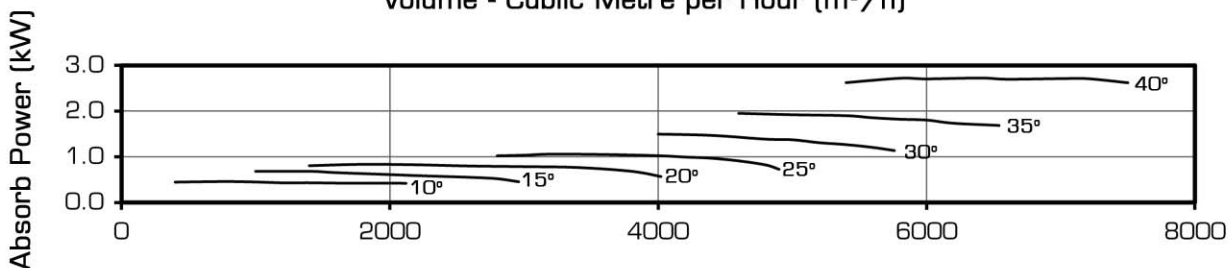
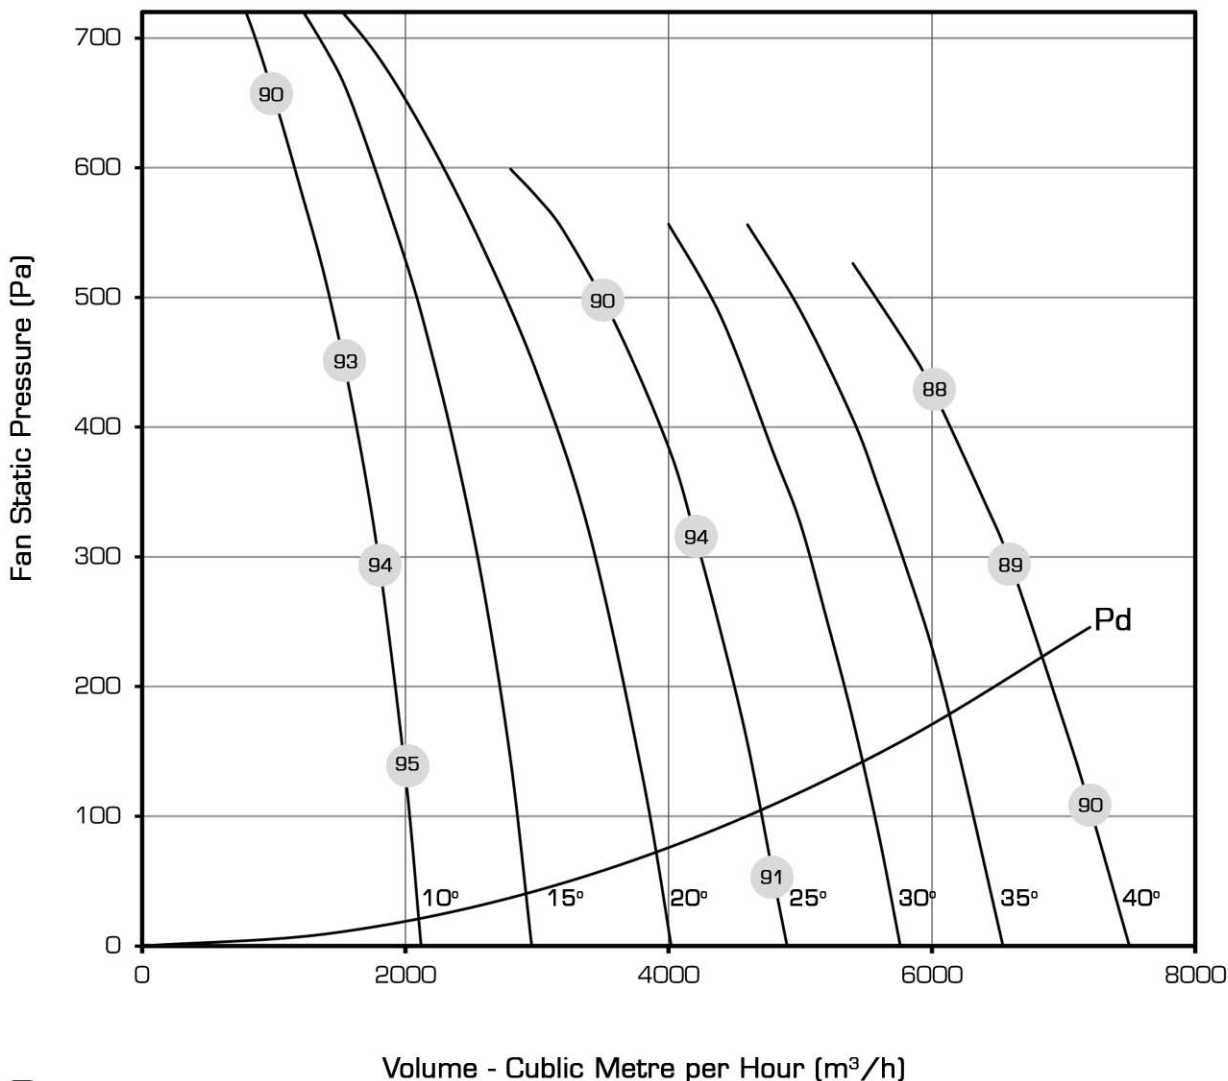


Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	0.457	0.681	0.833	1.056	1.494	1.969	2.723

AND 400/5/150 -
400 mm Diameter 2880 Rpm 50 Hz





Performance is rated for installation type D - Ducted Inlet, Ducted Outlet.
 Performance rating do not include the effects of appurtenances (accessories).
 Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
 Ratings include the effects of duct end correction.
 The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.

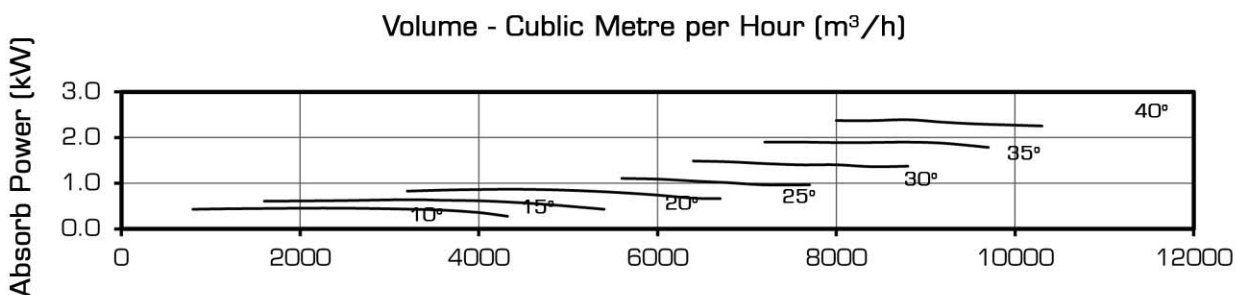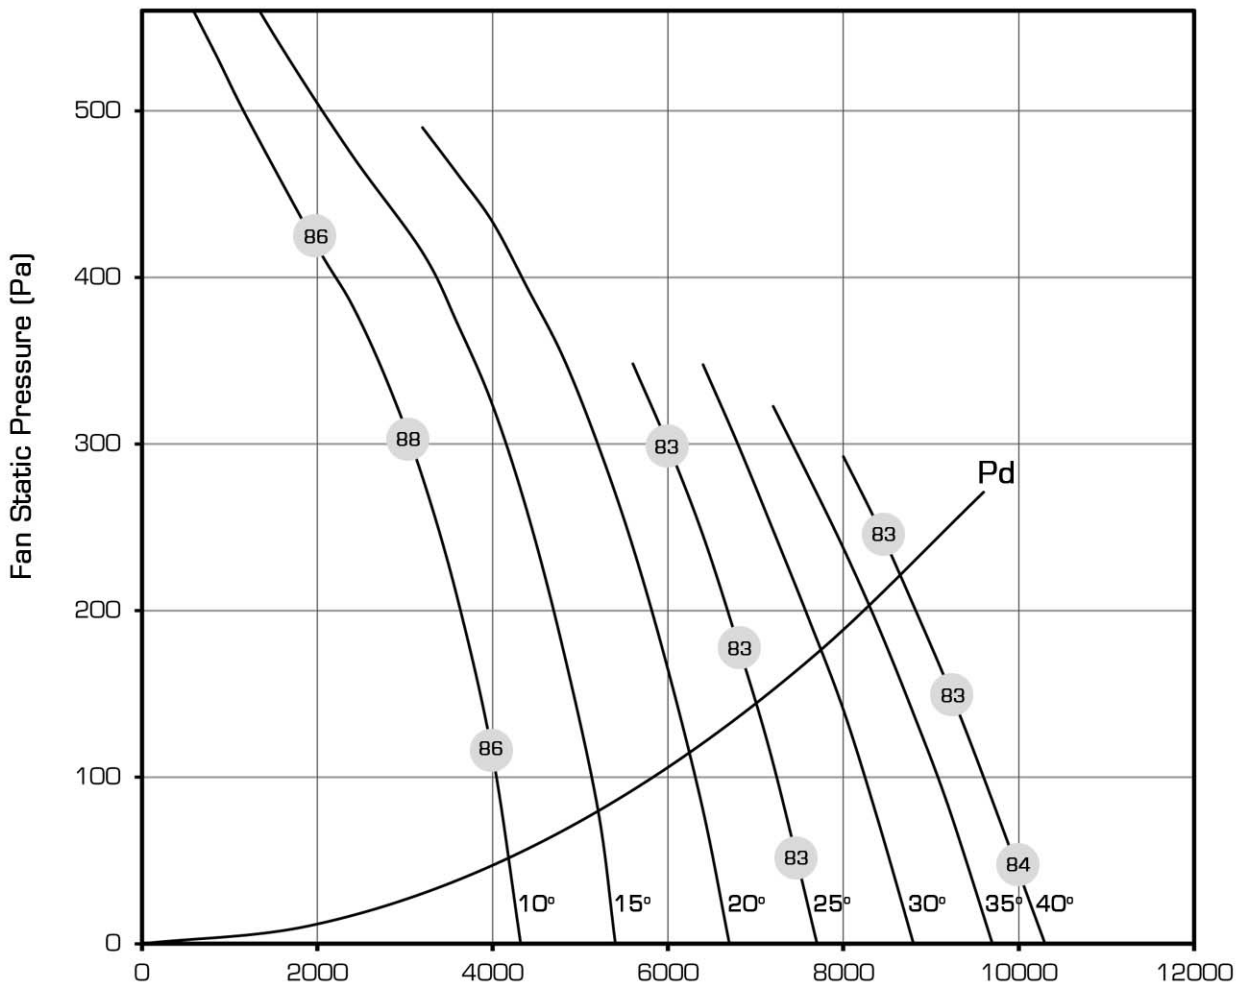

Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	0.452	0.678	0.866	1.104	1.486	1.900	2.389

AND 400/10/150 -
400 mm Diameter 2880 Rpm 50 Hz

Performance certified is for installation type D - Ducted Inlet, Ducted Outlet.
Performance rating do not include the effects of appurtenances (accessories).
Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
Ratings include the effects of duct end correction.
The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.
The AMCA Certified Ratings Seal applies to air and sound performance ratings only.

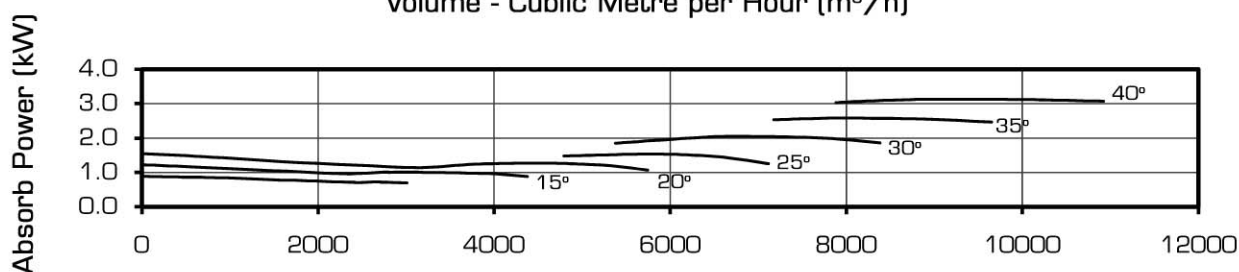
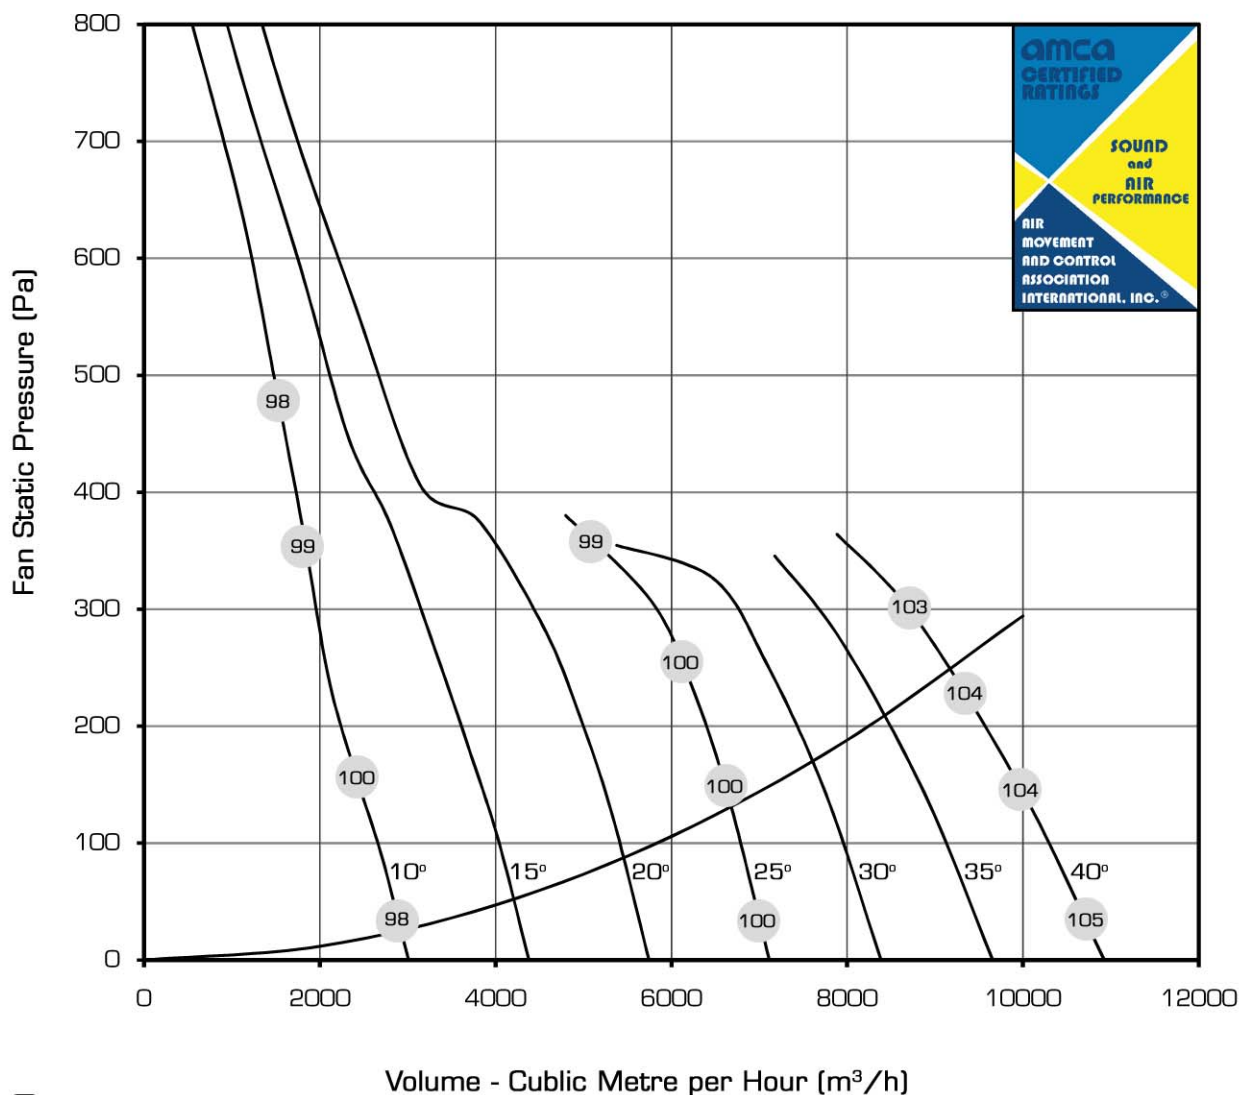


Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	0.896	1.224	1.552	1.880	2.369	2.856	3.344

AND 450/10/150 -
 450 mm Diameter 2880 Rpm 50 Hz



Performance is rated for installation type D - Ducted Inlet, Ducted Outlet.
 Performance rating do not include the effects of appurtenances (accessories).
 Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
 Ratings include the effects of duct end correction.
 The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.

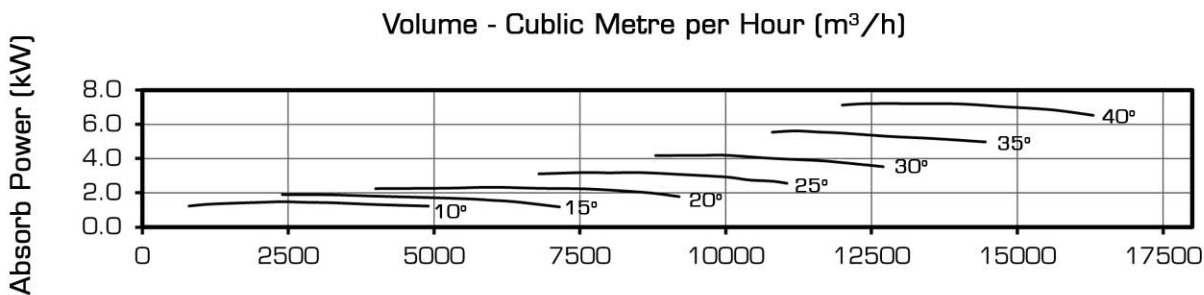
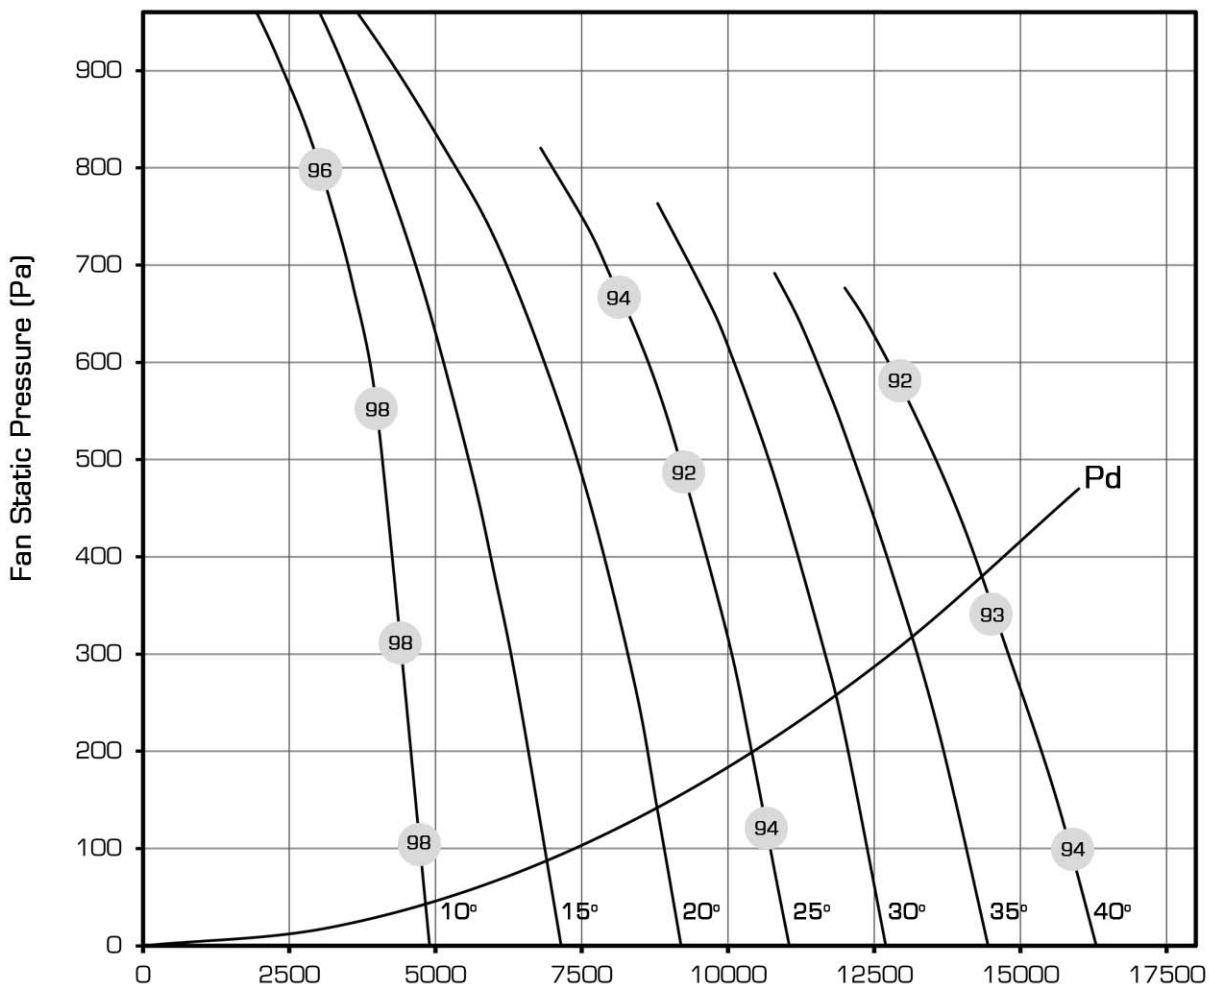


Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	1.480	1.900	2.325	3.188	4.193	5.613	7.208

AND 500/5/150 -
 500 mm Diameter 2880 Rpm 50 Hz




Performance is rated for installation type D - Ducted Inlet, Ducted Outlet.
 Performance rating do not include the effects of appurtenances (accessories).
 Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
 Ratings include the effects of duct end correction.
 The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.

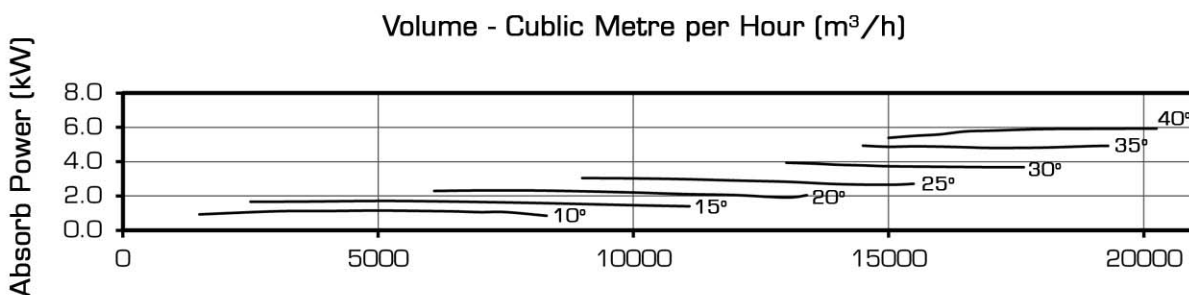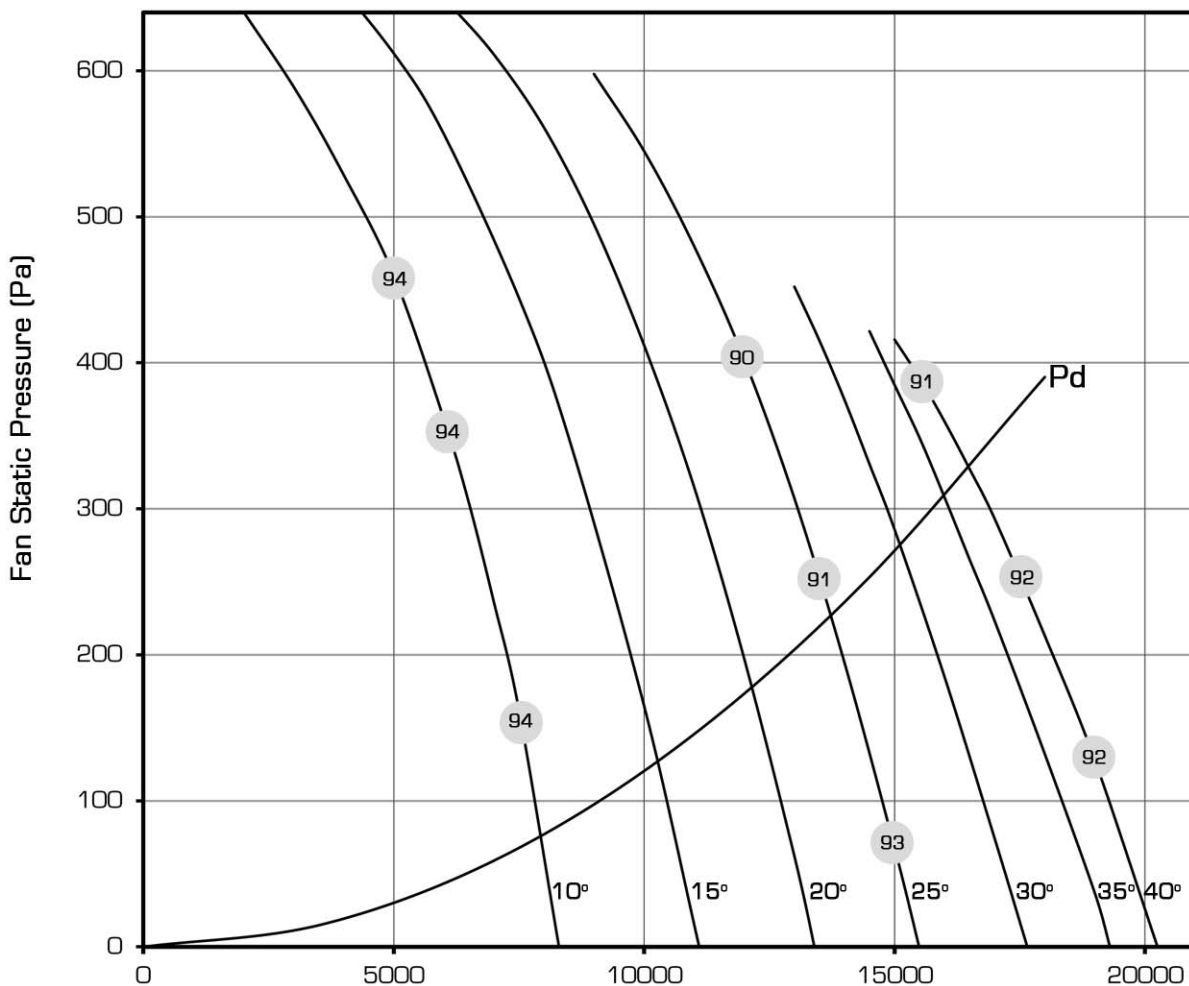

Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	1.153	1.715	2.326	3.048	3.967	4.936	5.936

AND 500/10/150 -
500 mm Diameter 2880 Rpm 50 Hz

Performance certified is for installation type D - Ducted Inlet, Ducted Outlet.
Performance rating do not include the effects of appurtenances (accessories).
Values shown are for inlet LW_i A sound power levels for installation type D : ducted inlet, ducted outlet.
Ratings include the effects of duct end correction.
The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.

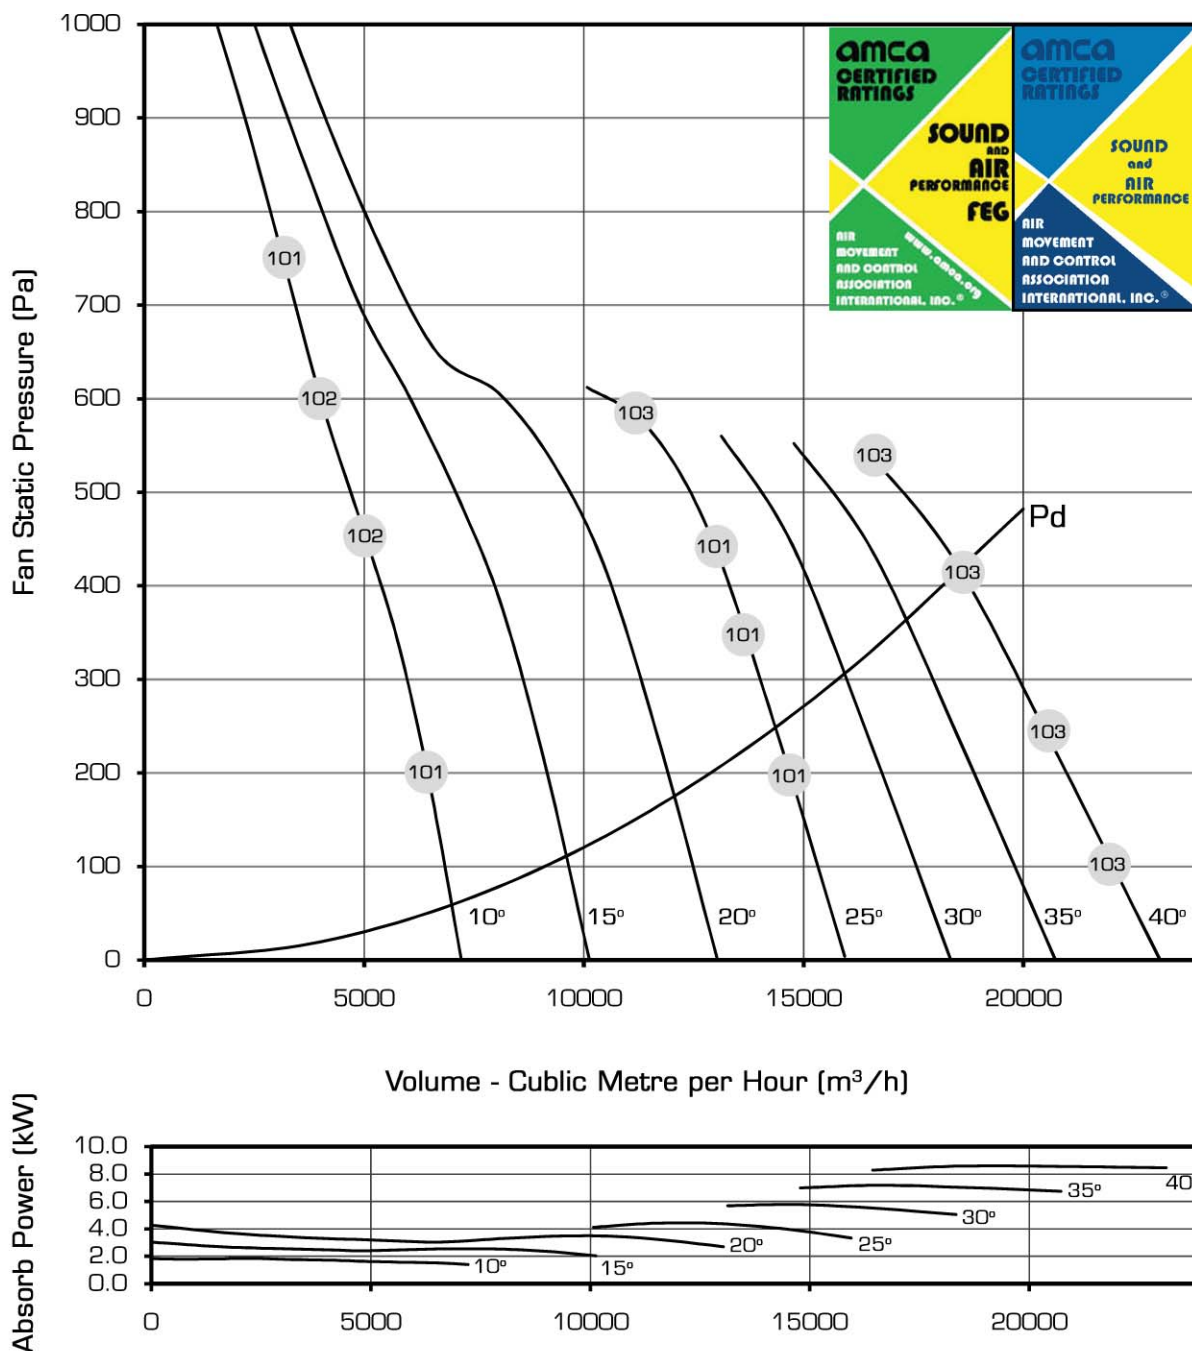

Pitch Angle	10°	15°	20°	25°	30°	35°	40°
Peak kW	1.832	3.045	4.260	5.472	6.501	7.531	8.560